


Product: Stoplogs

Stoplogs suitable for isolation of flow within an open channel (Three side Sealing)

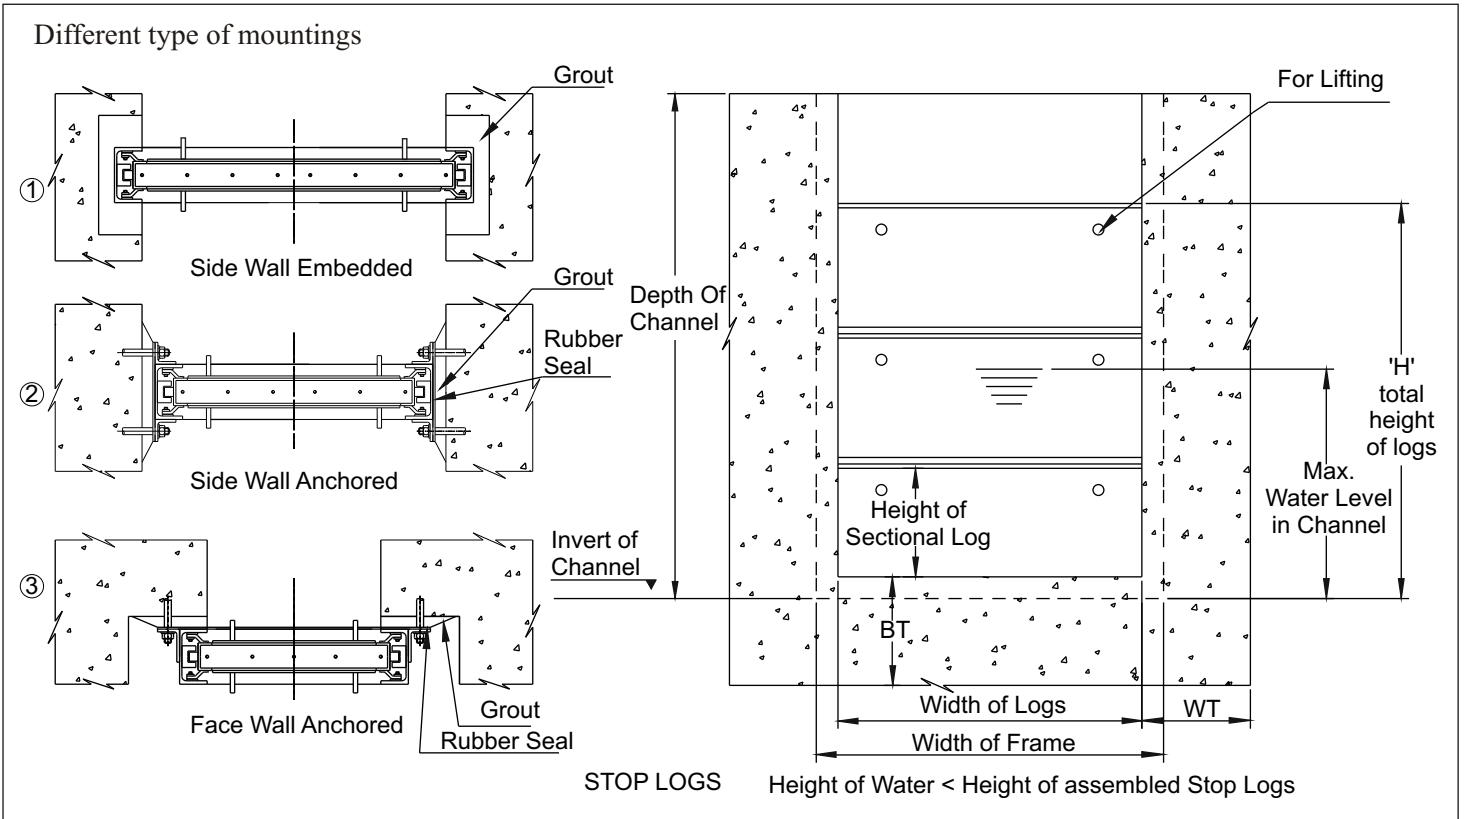

Client information:

Customer

Address

.....

.....

Contact person

Project

Phone & Fax

E-mail

Stoplog specifications:

Stoplog Tag Nos.

Stoplog size (mm)x.....(WxH)

Stoplog location

Stoplog quantity

Type of mounting (Refer sketch) Embedded

Type of lifting arrangement By rod

Type of Stoplog Unit piece

Anchored (wall mounted)

Lifting beam

Multipiece / Sectional

Levels & dimensions:

Invert level of channelmm

Max. water level in channelmm

Depth of channelmm

Side wall thickness of channel (WT)mm

Bottom thickness of channel(BT)mm

Stoplog frame

Stoplog


Fasteners

Rubber seal

Note: -Provide as much details as possible and if details are not available, then kindly give assumptions.

Product: Open Channel Sluice Gates

Sluice Gate suitable for isolation of flow within an open channel (Three side Sealing)

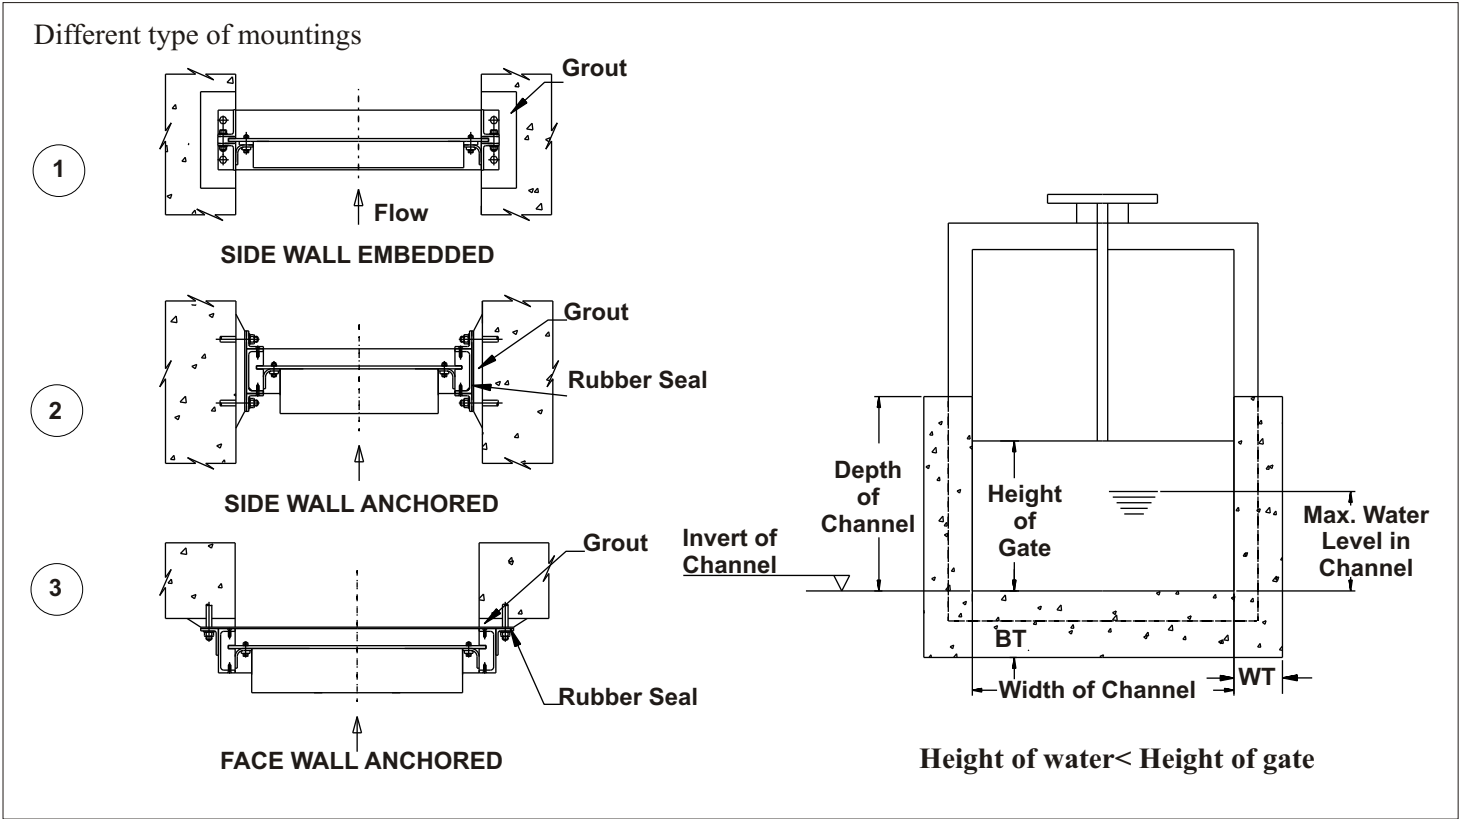

Client information:

Customer
 Address

Contact person
 Project
 Phone & Fax
 E-mail

Gate specifications:

Gate Tag Nos.
 Gate size (mm)x.....(WxH)

Gate location
 Gate quantity

- | | | |
|---------------------------------|-----------------------------------|--|
| Type of mounting (Refer sketch) | <input type="checkbox"/> Embedded | <input type="checkbox"/> Anchored (wall mounted) |
| Type of spindle | <input type="checkbox"/> Rising | <input type="checkbox"/> Non-rising |
| Type of operating arrangement | <input type="checkbox"/> Manual | <input type="checkbox"/> Electric |
| Opening indication | <input type="checkbox"/> Required | <input type="checkbox"/> Not required |

Levels & dimensions:


Invert level of channelmm
 Max. water level in channelmm
 Depth of channelmm
 Side wall thickness of channelmm
 Bottom thickness of channelmm

Gate frame & shutter
 Seat facing
 Spindle
 Fasteners
 Rubber seal

Note: -Provide as much details as possible and if details are not available, then kindly give assumptions.

Product: Face Wall Mounted Sluice Gates

Sluice Gate suitable for isolation of a conduit (Four sides sealing)

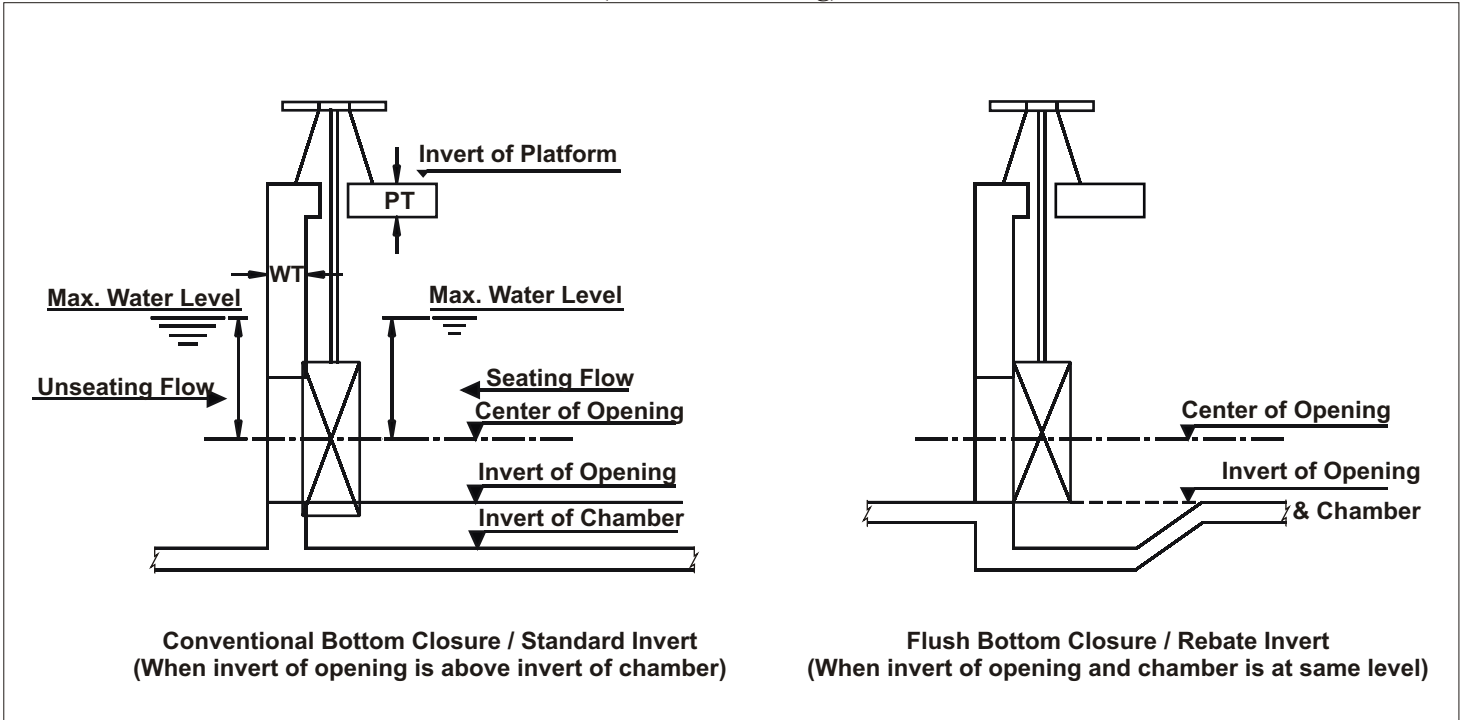

Client information:

Customer
 Address

Contact person
 Project
 Phone & Fax
 E-mail

Gate specifications:

Gate Tag Nos.
 Gate size (mm)x.....(WxH)

Gate location
 Gate quantity

- | | | |
|-------------------------------|---------------------------------------|--|
| Type of mounting | <input type="checkbox"/> Wall Mounted | <input type="checkbox"/> Thimble Mounted |
| Direction of opening | <input type="checkbox"/> Upward | <input type="checkbox"/> Downward |
| Type of spindle | <input type="checkbox"/> Rising | <input type="checkbox"/> Non-rising |
| Type of bottom closure | <input type="checkbox"/> Conventional | <input type="checkbox"/> Flush Bottom |
| Type of operating arrangement | <input type="checkbox"/> Manual | <input type="checkbox"/> Electric |
| Operating thrust reaction on | <input type="checkbox"/> Platform | <input type="checkbox"/> Gate assembly |
| Opening indication | <input type="checkbox"/> Required | <input type="checkbox"/> Not required |

Levels & dimensions:

Invert level Of Chambermm
 Invert level Of Openingmm
 Max. water level on Seating Sidemm
 Max. water level on Unseating Side.....mm
 Platform Levelmm
 Mounting Wall Thickness (WT)mm
 Platform Thickness (PT)mm


Gate frame & shutter
 Gate thimble
 Seat facing
 Spindle & coupling
 Fasteners
 Rubber seal

Note: -Provide as much details as possible and if details are not available, then kindly give assumptions.



Product: Face Wall Mounted Weir Gates

Weir Gate suitable for downward weir application (Three sides continuous sealing)

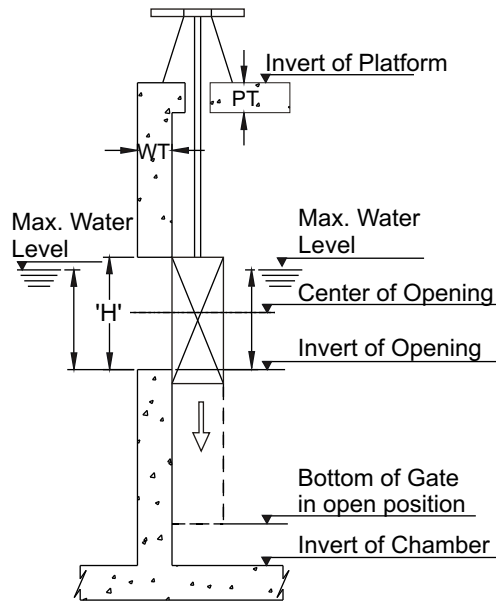

H=Height of Opening/Gate
 Max. Water Level < Height of Gate

WEIR GATE

Client information:

Customer
 Address

Contact person
 Project
 Phone & Fax
 E-mail

Gate specifications:

Gate Tag Nos.
 Gate size (mm)x.....(WxH)

Gate location
 Gate quantity

- | | | |
|-------------------------------|-----------------------------------|--|
| Type of spindle | <input type="checkbox"/> Rising | <input type="checkbox"/> Non-rising |
| Type of operating arrangement | <input type="checkbox"/> Manual | <input type="checkbox"/> Electric |
| Operating thrust reaction on | <input type="checkbox"/> Platform | <input type="checkbox"/> Gate assembly |
| Opening indication | <input type="checkbox"/> Required | <input type="checkbox"/> Not required |

Levels & dimensions:

Invert level Of Chambermm
 Invert level Of Openingmm
 Max. water level on Seating Sidemm
 Max. water level on Unseating Side.....mm
 Platform Levelmm
 Mounting Wall Thickness (WT)mm
 Platform Thickness (PT)mm

Gate frame & shutter
 Gate thimble
 Seat facing
 Spindle & coupling
 Fasteners
 Rubber seal

Note: -Provide as much details as possible and if details are not available, then kindly give assumptions.

